

TECHNICAL DATA

BOFLEX

CHAMPION

(Birch Plywood, BFU 100)
 Building height: 26 mm without top layer
 Board: 26 x 137 x 2200 mm
 Format: 15 Ply
 CE



WEIGHT LOAD



LOW FLOOR ELEVATION




FLOOR HEATING




SUITABLE FOR ELASTIC LAYER

- EDUCATION
- ARENA
- STUDIO & GYM
- HOTEL & HEALTH

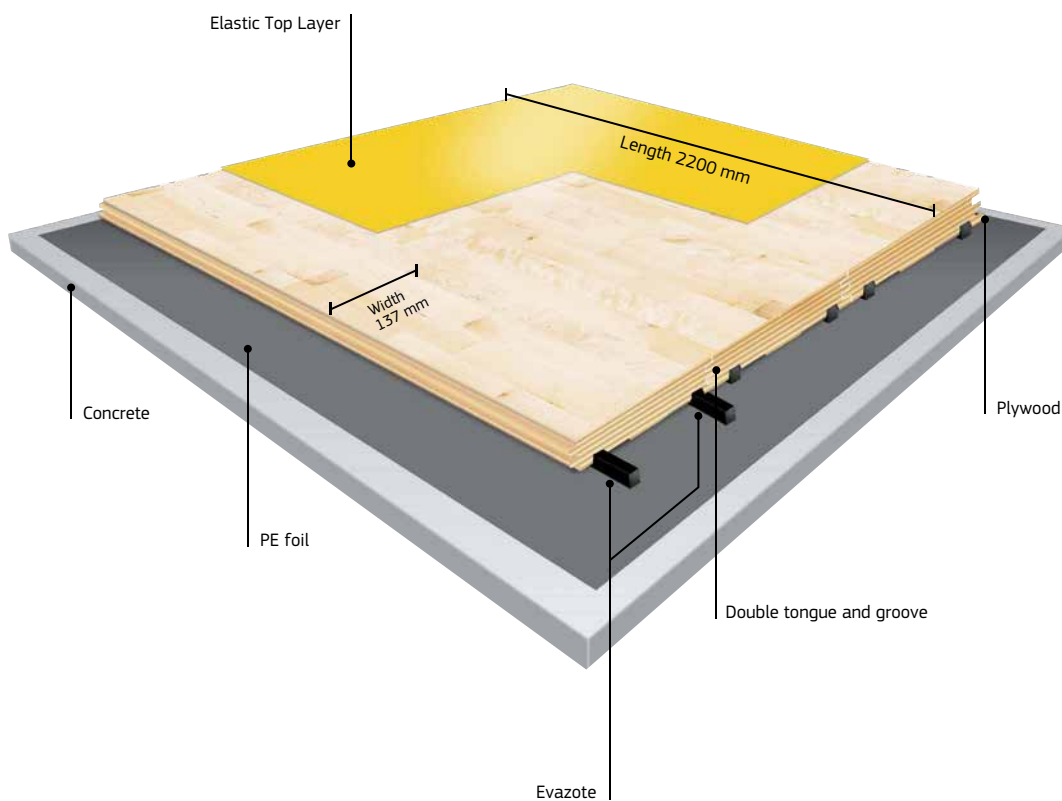

PERFORMANCE ACCORDING TO EN14904	SHOCK ABSORPTION		DEFORMATION		FRICTION	BALL BOUNCE	ROLLING LOAD
	TYPE 3: ≥ 40% ≤ 55%	TYPE 4: ≥ 55% ≤ 75%	TYPE 3: ≥ 1.8mm ≤ 3.5mm	TYPE 4: ≥ 2.3mm ≤ 5.0mm			
Boflex	CHAMPION	58%		2.6mm	-	93%	OK




Double tongue & groove

Wood species / Grading

Package overview

Boflex Champion *

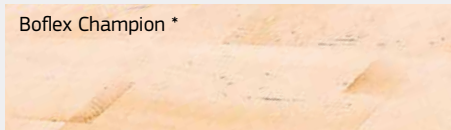

* FSC™ Mix 70%

Pack size: 6 boards = 1.81 m² (25 kg)
Pallet size: 49 packs = 88.69 m² (1225 kg)

Supplied: Boflex adhesive and perimeter support strips.

We reserve the right to deliver up to 10 % in lengths from 70 cm to 150 cm.

Boflex Champion Construction Details (from the top to the edge of concrete/subfloor)		Height
Boflex Champion • Plywood board • 2 strips of Evazote 50 are glued into the board	Boflex size: 26 x 137 x 2200 mm Boflex Champion board 21 mm + Evazote 5 mm (Board dimensions: 21 x 137 x 2200 mm + Evazote dimensions: 8 x 10 mm and 11 x 9 mm)	26 mm
Perimeter strips	4.4 x 22 x 1500 mm	✓
PE Foil (ordered separately)	Special requirement for new buildings: 2 layers of 0.2 mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4 mm
Construction height		26 mm

MAINTENANCE

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. www.fsc.org, FSC – The mark of responsible forestry.

