

TECHNICAL DATA

BOFLEX

OLYMPIA

Building height: 30 mm

Board: 30 x 137 x 2200 mm

Format: 2-strip

CE



WEIGHT LOAD



LOW FLOOR
ELEVATION




FLOOR HEATING

EDUCATION

ARENA

STUDIO
& GYM


HOTEL &
HEALTH

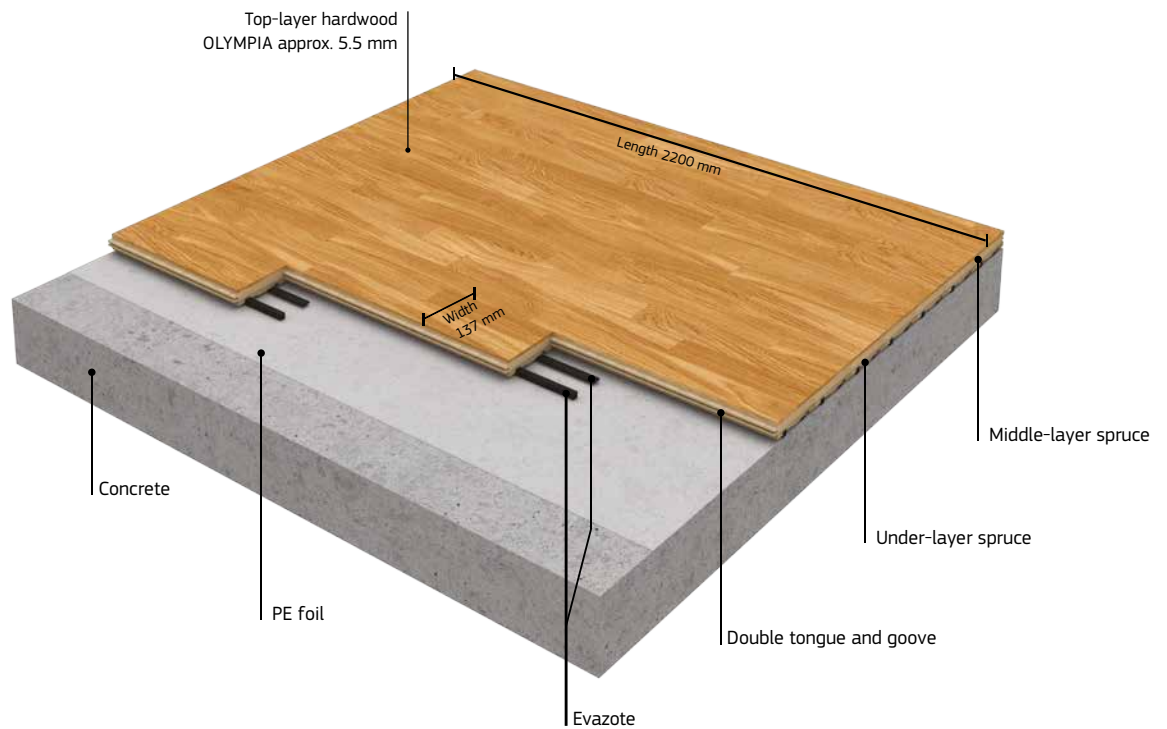

| PERFORMANCE ACCORDING TO EN14904 | | SHOCK ABSORPTION | | DEFORMATION | | FRICTION | BALL BOUNCE | ROLLING LOAD |
|--|---------|---------------------------|---------------------------|-------------------------------|-------------------------------|----------|----------------|-----------------|
| | | TYPE 3: ≥ 40% ≤ 55% | TYPE 4: ≥ 55% ≤ 75% | TYPE 3: ≥ 1.8mm ≤ 3.5mm | TYPE 4: ≥ 2.3mm ≤ 5.0mm | | | |
| Boflex | OLYMPIA | | 60% | | 2.9mm | 86 | 97% | OK |



2-strip



Double tongue & groove

Wood species / Grading

Package overview


Ash Sport *



Beech Sport *



Maple Can. Sport *



Oak Sport *



* FSC™ Mix 70%

Pack size: 6 boards = 1.81 m² (21 kg)
Pallet size: 49 packs = 88.69 m² (1029 kg)

Supplied: Boflex adhesive and perimeter support battens.

We reserve the right to deliver up to 10 % in lengths from 70 cm to 150 cm.

Boflex Olympia Construction Details (from the top to the edge of concrete/subfloor)

Height

| | | |
|--|--|--------|
| <p>Boflex Olympia</p> <ul style="list-style-type: none"> • Hardwood Top-Layer 5.5 mm • Middle layer and bottom layer • 2 strips of Evazote 50 are glued into the board | <p>Boflex size: 30 x 137 x 2200 mm Boflex Olympia board 25 mm + Evazote 5 mm (Board dimensions: 25 x 137 x 2200 mm + Evazote dimensions: 10 x 10 mm and 3.5 x 20 mm)</p> | 30 mm |
| <p>Perimeter strips</p> | 4.4 x 22 x 1500 mm | ✓ |
| <p>PE Foil (ordered separately)</p> | Special requirement for new buildings: 2 layers of 0.2 mm. It is not a moisture barrier, but gives to the floor an extra protection. | 0.4 mm |
| <p>Construction height</p> | | 30 mm |

MAINTENANCE

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. www.fsc.org, FSC – The mark of responsible forestry.



BOEN AS
EN 14904
DOP 4658



www.realwood.eu