

## TECHNICAL DATA Actiflex



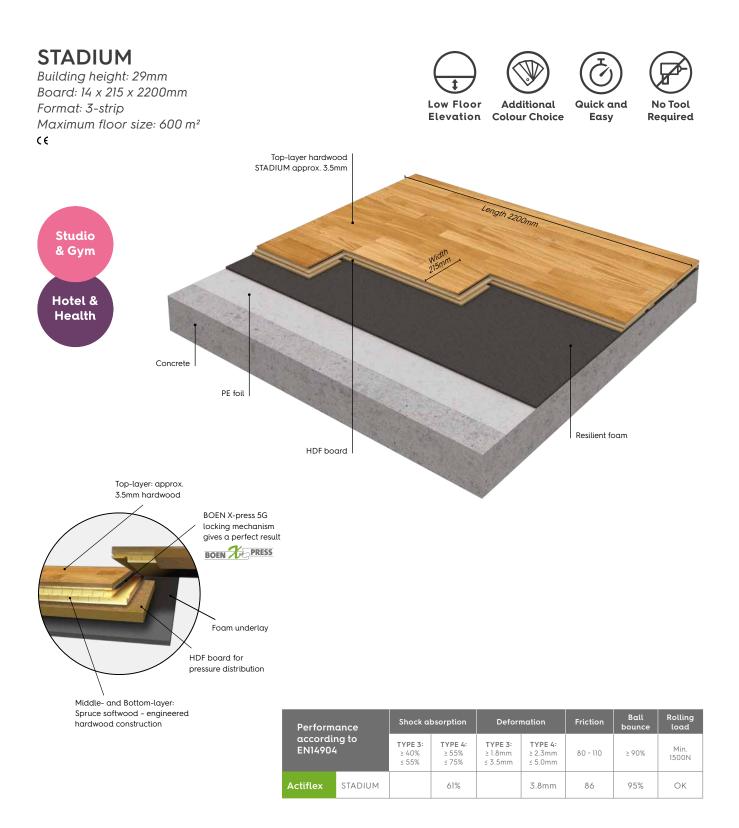

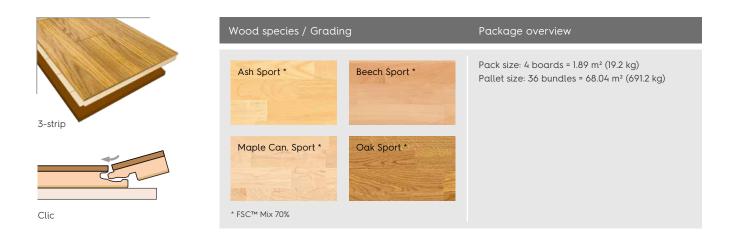

Actiflex Stadium Construction Details		Height
Actiflex Stadium • Hardwood top-layer 3.5mm • Middle layer and bottom layer spruce • HDF board glued to bottom	Actiflex size: 21 x 215 x 2200mm Actiflex Stadium board: 14 x 215 x 2200mm + HDF board 7mm	21mm
Resilient foam	8 x 1500 x 2000mm	8mm
Perimeter strips	15 x 100 x 1800mm	$\checkmark$
<b>PE foil</b> (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4mm
Construction height		29mm

## MAINTENANCE

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: boensport.com

The environment is at the core of all we do.

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. www.fsc.org, FSC - The mark of responsible forestry.



